




Advancing the Power of the Sun

144 Cell Mono
440-450W
BVM6612M(S)-HC-BF-DG

0~+5W
Power Tolerance

20.2%
Maximum Efficiency

440-450W
Power Output Range

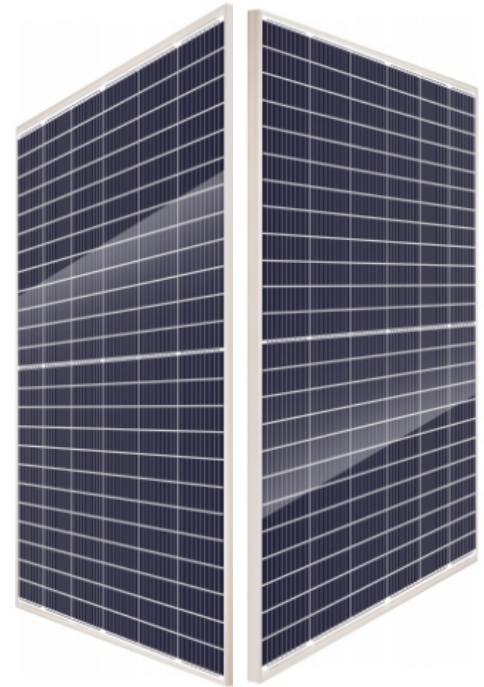

41.19 x 84.06 Inches
Silver Frame / Double-sided glass



High Quality and Reliable Modules

- ◆ Double-sided glass technology, more power generation
- ◆ Withstand up to 5400 Pa snow load and 2400 Pa wind load
- ◆ 2 EL inspections per cell/module for defect-free consistency
- ◆ High salt and ammonia resistance certified
- ◆ 0~+5 W guaranteed positive tolerance
- ◆ Rugged design for long-term durability; passed extended reliability tests




Warranty

- ◆ 12-year product warranty
- ◆ 30-year linear power output warranty



Comprehensive Certificates for Products and Management

- ◆ UL 61730, IEC 61215, IEC 61730, CEC listed, MCS and CE
- ◆ ISO 9001 for Quality Management Systems
- ◆ ISO 14001 for Environmental Management Systems
- ◆ OHSAS 18001 Occupational Health and Safety Systems

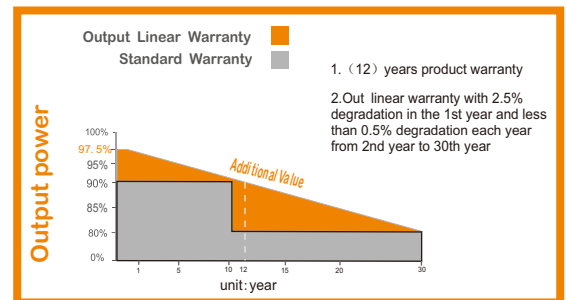

Listed in Bloomberg New Energy Finance's tier 1 list as of 1Q 2018



2107 N 1st Street Suite 550 San Jose, CA 95131

BOVIETSOLARUSA.COM ♦ 877.253.2858 ♦ SALES@BOVIETSOLARUSA.COM

Electrical Characteristics STC

	BVM6612M-440S-H-HC-BF-DG	BVM6612M-445S-H-HC-BF-DG	BVM6612M-450S-H-HC-BF-DG
Maximum Power (Pmax)	440W	445W	450W
Maximum Power Current (Imp)	10.92A	10.99A	11.06A
Maximum Power Voltage (Vmp)	40.30V	40.50V	40.69V
Short Circuit Current (Isc)	11.48A	11.55A	11.60A
Open Circuit Voltage (Voc)	48.60V	48.80V	49.05V
Module Efficiency	19.7%	19.9%	20.2%
Power Tolerance	0~+5W	0~+5W	0~+5W
STC: AM1.5, Irradiance 1000W/m ² , 25°C			

Electrical Characteristics NOCT

	BVM6612M-440S-H-HC-BF-DG	BVM6612M-445S-H-HC-BF-DG	BVM6612M-450S-H-HC-BF-DG
Maximum Power (Pmax)	324W	342W	361W
Maximum Power Current (Imp)	8.46A	8.65A	8.84A
Maximum Power Voltage (Vmp)	38.29V	39.54V	40.8V
Short Circuit Current (Isc)	8.87A	9.08A	9.28A
Open Circuit Voltage (Voc)	47.8V	48.2V	48.6V
NOCT: AM1.5, Irradiance 800W/m ² , 20°C, Wind speed 1m/s			

Mechanical Characteristics

Thermal Characteristics

Solar Cell	Bifacial-Monocrystalline 6.54 x 3.27 inch, 144 (6 x 24) pcs. in series	Pmax Temperature Coefficient	-0.37%/K
Double glass	2.0mm AR coating tempered glass+2.0mm Semi-tempered glass,low iron	Voc Temperature Coefficient	-0.30%/K
Frame	Anodized aluminum alloy	Isc Temperature Coefficient	+0.06%/K
Junction Box	IP67 rated, with 3 bypass diode	NOCT	113±3.6°F
Output Cable	4 mm ² (EU)/12 AWG (US), 15.76 inch		
Connector	MC4 compatible		
Dimension	84.06x 41.19 x 1.38 inch		
Weight	68.34 lb		

Maximum Ratings

Packing Information

Operating Temperature	-40°F~185°F	Pieces per pallet	30
Maximum Series Fuse Rating	20A	Pallets per container (40HQ)	22
Maximum System Voltage	1000/1500V DC	Pieces per container (40HQ)	660
		Pallet weight/size	2162 lb/ 85.23 x 46.85 x 45.08 inch

Bifacial Output-Backside Power Gain

10%	Pmax (W)	484	489	495
	Module efficiency (%)	21.67	21.89	22.17
20%	Pmax (W)	528	534	540
	Module efficiency (%)	23.64	23.91	24.18

